




## Guard Bracket Install Instructions

www.tamerbilletmx.com  
402-420-9557

- Step 1** Remove stock center mounting bolt from throttle side of plastic fork guard
- Step 2** Using the supplied bolt, mount the Tamer Guard Bracket on the fork guard and tighten
- Step 3** Drill 1/8" hole through the plastic fork guard. DO NOT hit the fork leg.
- Step 4** Remove plastic guard from bike and drill out the 1/8" hole from step 3 in plastic to 3/16" size.
- Step 5** Install Phillips head screw through plastic from inside and then apply blue Loc-tite to threads.
- Step 6** Install Guard Bracket onto screw and tighten.
- Step 7** Install plastic fork guard back onto forks. Apply Loc-tite to bolt that goes into fork leg.



**TOOLS NEEDED:** Drill, 1/8" and 3/16" drill bits, 4mm and 5mm allen wrenches, Phillips screwdriver

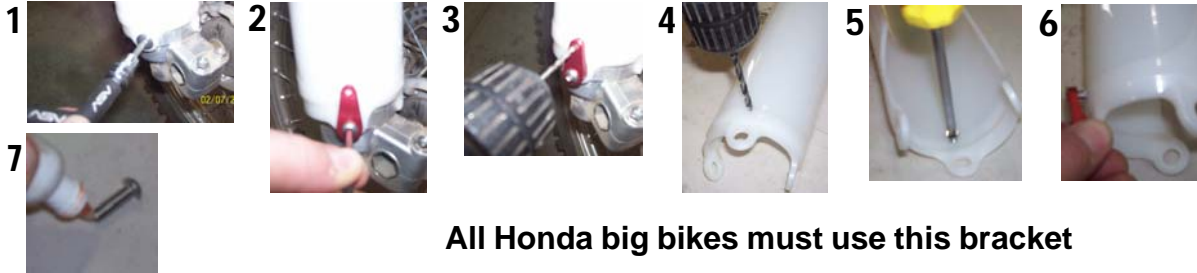

**All Honda big bikes must use this bracket**




## Guard Bracket Install Instructions

www.tamerbilletmx.com  
402-420-9557

- Step 1** Remove stock center mounting bolt from throttle side of plastic fork guard
- Step 2** Using the supplied bolt, mount the Tamer Guard Bracket on the fork guard and tighten
- Step 3** Drill 1/8" hole through the plastic fork guard. DO NOT hit the fork leg.
- Step 4** Remove plastic guard from bike and drill out the 1/8" hole from step 3 in plastic to 3/16" size.
- Step 5** Install Phillips head screw through plastic from inside and then apply blue Loc-tite to threads.
- Step 6** Install Guard Bracket onto screw and tighten.
- Step 7** Install plastic fork guard back onto forks. Apply Loc-tite to bolt that goes into fork leg.



**TOOLS NEEDED:** Drill, 1/8" and 3/16" drill bits, 4mm and 5mm allen wrenches, Phillips screwdriver

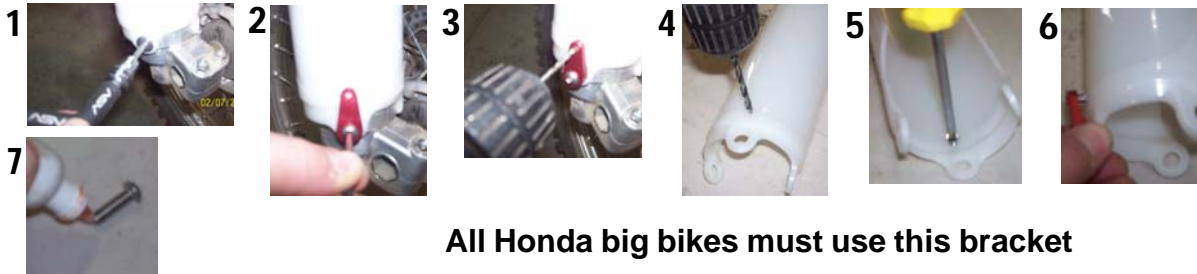

**All Honda big bikes must use this bracket**




## Guard Bracket Install Instructions

www.tamerbilletmx.com  
402-420-9557

- Step 1** Remove stock center mounting bolt from throttle side of plastic fork guard
- Step 2** Using the supplied bolt, mount the Tamer Guard Bracket on the fork guard and tighten
- Step 3** Drill 1/8" hole through the plastic fork guard. DO NOT hit the fork leg.
- Step 4** Remove plastic guard from bike and drill out the 1/8" hole from step 3 in plastic to 3/16" size.
- Step 5** Install Phillips head screw through plastic from inside and then apply blue Loc-tite to threads.
- Step 6** Install Guard Bracket onto screw and tighten.
- Step 7** Install plastic fork guard back onto forks. Apply Loc-tite to bolt that goes into fork leg.



**TOOLS NEEDED:** Drill, 1/8" and 3/16" drill bits, 4mm and 5mm allen wrenches, Phillips screwdriver

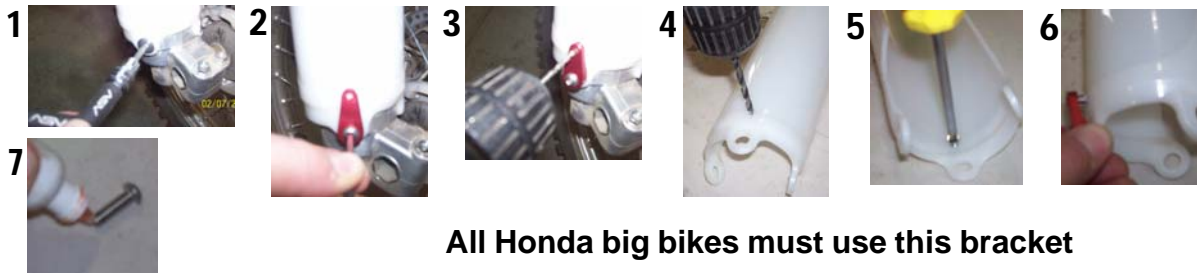

**All Honda big bikes must use this bracket**